

DHU - 60 / 80 TOUCH II SOFT MOUNT WASHER EXTRACTORS



TOUCH II

User friendly and totally programmable 7" Touch II USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions) 37 languages 8 dosing signals as standard



G FACTOR

High G-Factor: G-FACTOR 450 for high spin washers



EFFICIENCY

Intelligent Weighing System
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø18" (for DHU-60) and Ø22" (for DHU-80)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors, electronic devices, gear
Technical menu: traceability, error diagnosis



OTHERS


Grey skinplate outer casing
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
CE, WRAS and EAC approved product. Option ETL



OPTIONS

- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Silicon gasket (for DHU-60)
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align loading height (door base at 850mm)
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Coin/token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	DHU - 60 TOUCH II	DHU - 80 TOUCH II
DRUM			
Load capacity	lbs / Kg	60 / 25	80 / 35
Volume	cu. ft. / l	8.7 / 247	14 / 350
Diameter	in. / mm	30.31 / 770	34 / 860
Depth	in. / mm	20.86 / 530	24 / 603
GENERAL DETAILS			
Washing speed	r.p.m.	45	45
G Factor	-	450	450
Maximum force transmitted	KN	4,92 ±1,75	7,36 ±2,45
Frequency-dynamic force	Hz	15	14,3
Sound level	dB	<70	<70
Coin laundry version	-	Yes	Yes
Double drain	-	EXTERNAL - Opt	Opt
Spining speed	r.p.m	900	900
DOOR			
Door bottom to floor	in. / mm	24.02 / 610	22.55 / 522
Diameter	in. / mm	14.68 / 373	22.05 / 560
POWER			
Motor	kW	3	4
Electric heating power	kW	18	21
Total electric power (electric model)	kW	19,2	22
Total electric power (hw, steam model)	kW	6	7
CONNECTIONS			
Voltage / Phase (50hz or 60hz)	-	208 - 240 / 1PH	208 - 240 / 3PH
Full load current /Breaker (amps)	-	13.7 / 20	13.7 / 20
Steam inlet (Steam mod.)	inch	3/4"	3/4"
Maximum steam consumption (Steam mod.)	Kg / h	15	18
Water inlet	GHT / BSP	3/4 3/4	3/4 3/4
Water main pressure	Kgs / cm ²	2 - 4	2 - 4
Maximum water consumption*	Lit / h	175,5	261,3
Drain	in. / mm	3 / 76	3 / 76
Drainage capacity	Lit / min	200	200
DIMENSIONS			
Width	in. / mm	38 / 979	43.11 / 1095
Depth (overall)	in. / mm	38.30 / 973	46.61 / 1184
Height	in. / mm	61.14 / 1553	62.91 / 1598
Weight	lbs / Kg	1107 / 490	1653 / 750
Volume	m3	2,23	2,75

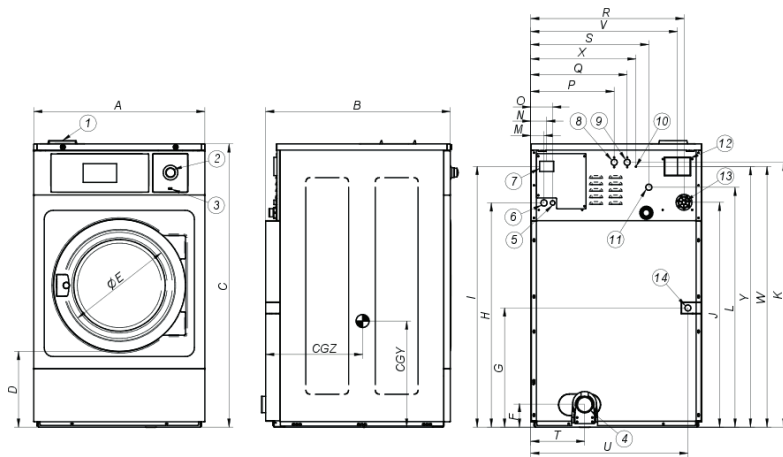

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT /WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DHU-60	979	1.041	1.553	560	460	133	490	1.282	1.450	1.259	1.465	1.354	61	74	101	481	561	861	673	367	909	831	1.424	624	1.510	773	710
DHU-80	1.095	1.184	1.598	540	525	158	576	1.330	1.498	1.297	1.513	1.383	61	74	101	596	676	976	808	384	1.028	946	1.462	861	1.558	795	732